
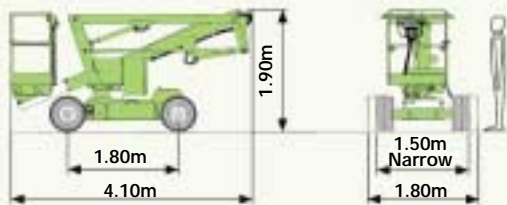


# Heightrider 12

The Height Rider 12 is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it an ideal tool for a wide range of applications.

## Safety Features

- ▶ Automatic failsafe brakes
- ▶ Tilt alarm
- ▶ Foam filled or solid tyres
- ▶ Emergency descent system with hand-pump
- ▶ Dual controls (platform & base)
- ▶ Lock valves on all hydraulic cylinders
- ▶ Dual harness points
- ▶ CE Mark

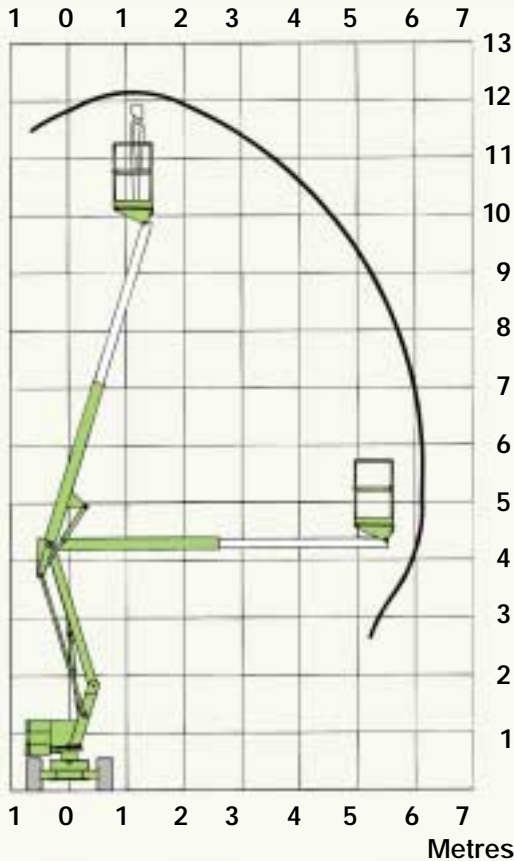

The Height Rider 12 combines robust construction with compact, low weight design. The Bi-Energy option allows it to work for extended periods inside and outside making it the perfect all-rounder.

## Specifications

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 5in
Working Outreach	6.10m	20ft 1in
Width [Standard]	1.80m	5ft 10in
[Narrow]	1.50m	4ft 11in
Height Stowed	1.90m	6ft 3in
Overall Length	4.10m	13ft 5in
Weight [Standard]	2400kg	5285lbs
[Narrow]	2950kg	6490lbs
Turning Radius (inside)	2.22m	7ft 3in
(outside)	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 8in x 2ft 1in
Tyres	Foam filled, solid or non-marking	
Brake System	Dual automatic failsafe braking system	
Control System	Fully proportional hydraulic controls	
Power Options	Bi-Energy (engine and battery) Battery only Petrol or diesel engine only	

Due to a policy of continuing development and improvement we reserve the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by: