

Trailer Mount

UpRight
POWERED ACCESS



- 12.2m working height
- 5m working outreach
- Proportional hydraulic controls
- Manual outriggers
- Small working footprint
- Automatic dual voltage 'Charge & Run' battery charger

TL34

TL34 trailer mount specifications

		TL34
max. working height		12.2m
max. platform height		10.2m
max. outreach		5.0m
platform capacity (SWL)		215kg
outrigger footprint (manual)		2.9m x 3.4m
outrigger footprint (hydraulic)		2.9m x 3.2m
turret rotation		360 degrees
platform depth		0.8m
platform width		1.2m
stowed height		2.2m
towing length		5.2m
towing width		1.5m
weight (manual)		1190kg
weight (hydraulic)		1290kg
control system	fully hydraulic proportional controls at platform and emergency controls at ground	
power source	12v battery (2 x 6v 195Ah batteries)	

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance.



BP2 TL34 9/08

skyreach
access solutions

Sky House, Daurada Drive, Stafford,
Staffordshire, ST17 4XW, U.K.

Tel: + 44 (0) 1785 244177 Fax: + 44 (0) 1785 229874


www.skyreachaccess.com

standard features

- Load sensing outrigger interlocks with LED display
- Power Save descent feature
- Proportional live hydraulic controls at basket
- Emergency controls at ground
- Automatic reversing and overrun braking
- Integral road lighting board
- 1 year parts and labour warranty
- 5 year structural warranty

options

- Hydraulic outriggers
- Special paint colours

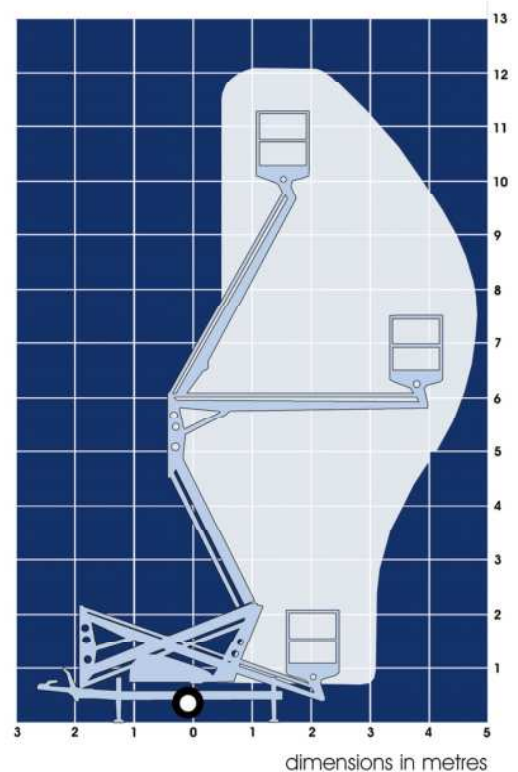

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
POWERED ACCESS