

# nifty 120T

Designed specifically to give maximum performance from the most compact chassis possible, the Nifty 120T utilises its versatile telescopic boom to deliver unrivalled working outreach. Hydraulically operated outriggers make set up quick and easy and telescopic axles coupled with a compact base make this one of the most manoeuvrable 12m trailer mounts available.

## Safety Features


- ▶ Pressure sensitive outriggers with interlocks & audible alarm
- ▶ Dual controls (platform & base)
- ▶ Emergency descent system with hand-pump
- ▶ Lock valves on all hydraulic cylinders
- ▶ Overrun brake system with gas spring handbrake
- ▶ CE Mark



The telescopic boom provides outstanding working outreach especially at lower level where it's needed most.



Telescopic axles and compact dimensions allow the Nifty 120T to manoeuvre with ease even in the most restricted areas.

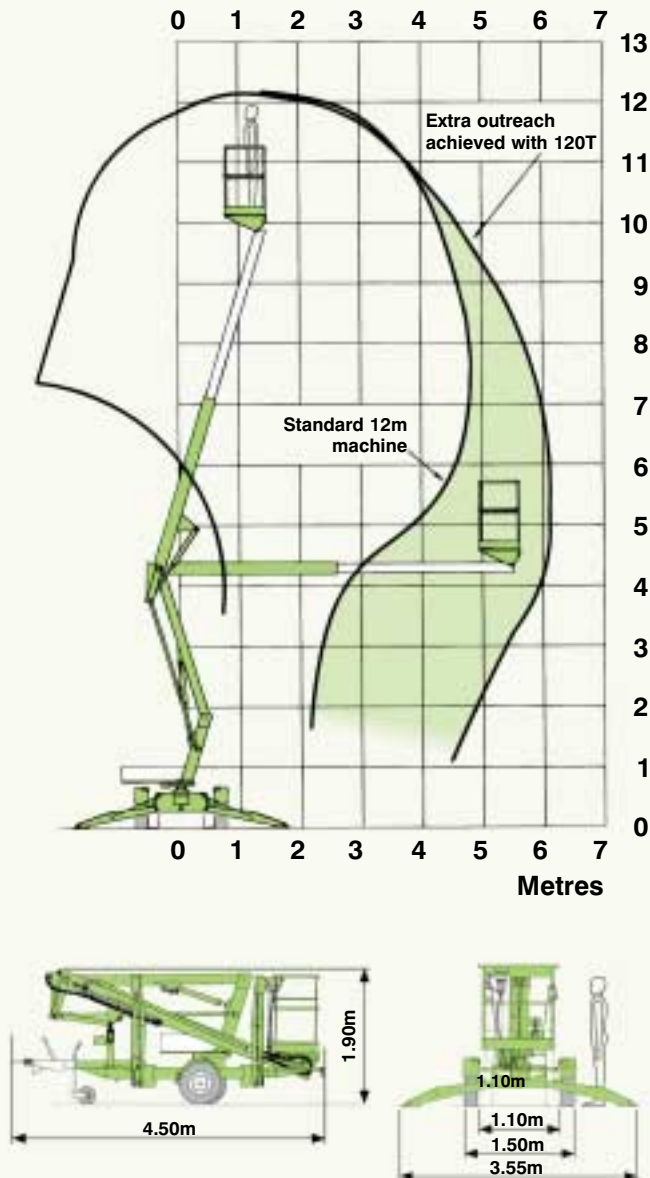

## Specifications

<b>Working Height</b>	12.20m	40ft
<b>Platform Height</b>	10.20m	33ft 6in
<b>Working Outreach</b>	6.10m	20ft 1in
<b>Slew</b>	360°	
<b>Travelling Width</b>	1.50m	4ft 11in
<b>Working Width</b>	3.55m	11ft 8in
<b>Axles Retracted Width</b>	1.10m	3ft 7in
<b>Height Stowed</b>	1.90m	6ft 3in
<b>Overall Length</b>	4.50m	14ft 9in
<b>Weight</b>	1400kg	3080lbs
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 8in x 2ft 1in
<b>Control Systems</b>	Fully proportional hydraulic controls	
<b>Power Options</b>	Bi-Energy (engine and battery) Mains only Battery only Petrol or diesel engine only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.