

ELECTRIC SCISSOR LIFTS

	3369LE	M3369	4069LE	M4069
A. Platform Height – Elevated	10.06 m	10.06 m	12.19 m	12.19 m
B. Platform Height – Lowered	1.66 m	1.66 m	1.73 m	1.73 m
C. Platform Railing Height ¹	1.10 m	1.10 m	1.10 m	1.10 m
D. Stowed Height (Rails Folded)	1.94 m	1.94 m	2.01 m	2.01 m
E. Platform Size	1.65 m x 2.92 m	1.65 m x 2.92 m	1.65 m x 2.92 m	1.65 m x 2.92 m
F. Deck Extension	0.91 m	0.91 m	0.91 m	0.91 m
G. Overall Width	1.75 m	1.75 m	1.75 m	1.75 m
H. Overall Length ²	3.10 m	3.10 m	3.10 m	3.10 m
I. Wheelbase	2.30 m	2.30 m	2.30 m	2.30 m
J. Ground Clearance	0.20 m	0.20 m	0.20 m	0.20 m
Platform Capacity	450 kg	450 kg	360 kg	360 kg
Capacity on Deck Extension	120 kg	120 kg	120 kg	120 kg
Lift/Lower Time	38/42 sec.	38/42 sec.	54/50 sec.	54/50 sec.
Maximum Drive Height	10.06 m	10.06 m	9.14 m	9.14 m
Gross Vehicle Weight ¹	4,600 kg	5,000 kg	5,300 kg	5,700 kg
Drive Speed – Lowered	5.6 km/h	5.6 km/h	5.6 km/h	5.6 km/h
Drive Speed – Elevated	0.6 km/h	0.6 km/h	0.6 km/h	0.6 km/h
Gradeability	35%	35%	35%	35%
Turning Radius – Inside	2.30 m	2.30 m	2.30 m	2.30 m
Turning Radius – Outside	3.81 m	3.81 m	3.81 m	3.81 m
Tyres (non-marking)	240/55-17.5	240/55-17.5	240/55-17.5	240/55-17.5
Brakes	Automatic Spring Applied	Automatic Spring Applied	Automatic Spring Applied	Automatic Spring Applied
Drive Motors	Dual Electric Traction	Dual Electric Traction	Dual Electric Traction	Dual Electric Traction
Hydraulic Pump Motor	Perm. Magnet	Perm. Magnet	Perm. Magnet	Perm. Magnet
Batteries	8 x 6V 370 A/hr	8 x 6V 370 A/hr	8 x 6V 370 A/hr	8 x 6V 370 A/hr
Charger (120/240V - 50/60HZ)	23 Amp SCR Automatic	23 Amp SCR Automatic	23 Amp SCR Automatic	23 Amp SCR Automatic
Hydraulic Pump	Gear Pump	Gear Pump	Gear Pump	Gear Pump
Hydraulic Reservoir	32.18 L	32.18 L	32.18 L	32.18 L
Generator Set	—	Yanmar Air-Cooled 4.5 kW	—	Yanmar Air-Cooled 4.5 kW
Generator Fuel Tank	—	15.2 L	—	15.2 L



¹ Certain weights and dimensions may vary due to options and to compliance with country standards.

² Overall length with optional leveling jacks is 3.81 m.

Specifications may change to meet country standards or with the addition of optional equipment.



JLG MODELS 3369LE & M3369

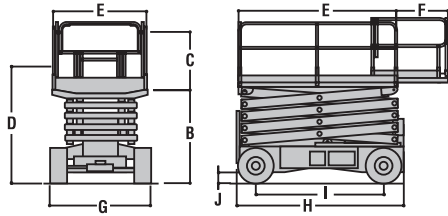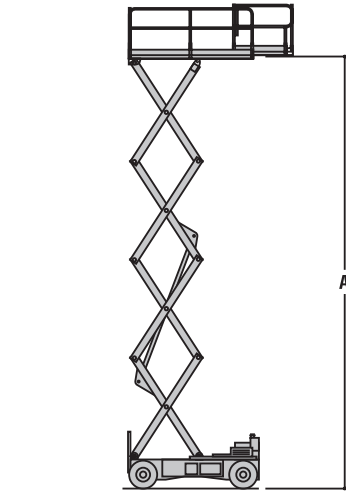

JLG MODELS 4069LE & M4069

